

Bruchsch Liecht?

**DE NOSI HÄT'S!**

LED Wand-/Deckenleuchten  
LED Plafonniers / Appliques  
Lampadari LED



**NOSERLIGHT** AG

CH-8909 Zwillikon, Tel. +41 44 701 81 81, info@nosерlight.ch

[www.noserlight.ch](http://www.noserlight.ch)

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari



W	V	lm	CRI		IP	h <sub>m</sub>		K°
21	110-240	1480	80	120	20	>20'000	180mm	2700-3000

D: LED Wand-/Deckenleuchte, rund, dimmbar, Alu, 180mmx35mm (DxH), 21W, 1480lm, IP20, 2700-3000°K - warmweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, rond, dimmable, alu, 180mmx35mm (DxH), 2700- 3000°K - blanc chaud, IP20, 21W, 1480lm, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLAB21W-WW**

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari



W	V	lm	CRI		IP	h <sub>m</sub>		K°
36	110-240	1480	80	120	20	>20'000	320mm	2700-3000

D: LED Wand-/Deckenleuchte, rund, Alu, 320mmx35mm (DxH), dimmbar, 36W, 1480lm, IP20, 2700-3000°K- warmweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, rond, alu, 320mmx35mm (DxH), dimmable, 2700-3000°K - blanc chaud, 36W, 1480lm, IP20, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLAB36W-WW**

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari



W	V	lm	CRI		IP	h <sub>m</sub>		K°
36	110-240	1480	80	120	20	>20'000	320mm	4000-4500

D: LED Wand-/Deckenleuchte, rund, Alu, 320mmx35mm (DxH), dimmbar, 21W, 1480lm, IP20, 4000-4500°K- kaltweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, rond, alu, 320mmx35mm (DxH), dimmable, 4000-4500°K - blanc froid, 21W, 1480lm, IP20, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLAB36W-CW**

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques.



W	V	lm	CRI		IP	h <sub>m</sub>	∅	K°
15	240	>1000	80	180	44	>20'000	290mm	4000

D: LED Wand-/Deckenleuchte, rund, Alu gebürstet, 290mm, dimmbar, 15W (max.18W), >1000lm, IP44, 3000°K - warmweiss, CRI>80, 180°, 240V, Abdeckung weiss

F: LED Plafonnier / Applique, rond, Alu brossé, 290mm, dimmable, 3000°K - blanc chaud, 15W (max17.5W), >1000lm, CRI>70, 240V, couvercle blanc, PMMA UV résistant, 180°

Art. Nr. / No. art. / Item no.  
505.15CWDH

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques.




W	V	lm	CRI		IP	h <sub>m</sub>	∅	K°
15	240	>1000	80	180	44	>20'000	290mm	3000

D: LED Wand-/Deckenleuchte, rund, Alu gebürstet, 290mm, dimmbar, 15W (max.18W), >1000lm, IP44, 3000°K - warmweiss, CRI>80, 180°, 240V, Abdeckung weiss

F: LED Plafonnier / Applique, rond, Alu brossé, 290mm, dimmable, 3000°K - blanc chaud, 15W (max17.5W), >1000lm, CRI>70, 240V, couvercle blanc, PMMA UV résistant, 180°

Art. Nr. / No. art. / Item no.  
505.15WWDH

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques.

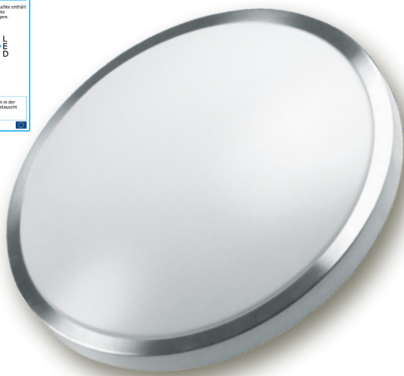

W	V	lm	CRI		IP	h <sub>m</sub>	∅	K°
20	240	>1400	80	180	44	>20'000	410mm	4000

D: LED Wand-/Deckenleuchte, rund, Alu gebürstet, 410mm, dimmbar, 20W (max.24W), >1400lm, IP44, 3000°K - warmweiss, CRI>80, 180°, 240V, Abdeckung weiss,

F: LED Plafonnier / Applique, rond, alu brossé, 410mm, dimmable, 3000°K - blanc chaud, 20W (max.24W), >1400lm, CRI>70, 240V, 180°, couvercle blanc, PMMA UV résistant

Art. Nr. / No. art. / Item no.  
505.20CWDH

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques.




W	V	lm	CRI		IP	h <sub>m</sub>	∅	K°
20	240	>1400	80	180	44	>20'000	410mm	3000

D: LED Wand-/Deckenleuchte, rund, Alu gebürstet, 410mm, dimmbar, 20W (max.24W), >1400lm, IP44, 3000°K - warmweiss, CRI>80, 180°, 240V, Abdeckung weiss,

F: LED Plafonnier / Applique, rond, alu brossé, 410mm, dimmable, 3000°K - blanc chaud, 20W (max.24W), >1400lm, CRI>70, 240V, 180°, couvercle blanc, PMMA UV résistant

Art. Nr. / No. art. / Item no.  
505.20WWDH

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari



W	V	lm	CRI	$\triangle$	IP	$h_m$	$\emptyset$	K°
21	110-240	1480	80	120	20	>20'000	180mm	2700-3000

D: LED Wand-/Deckenleuchte, quadratisch, Alu, 180mmx35mmx180mm (LxHxB), dimmbar, 21W, 1480lm, IP20, 2700-3000°K- warmweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, quadratique, alu, 180mmx35mmx180mm (LxHxL), dimmable, 2700-3000°K - blanc chaud, 21W, 1480lm, IP20, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLQAB21W-WW**

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari



W	V	lm	CRI	$\triangle$	IP	$h_m$	$\emptyset$	K°
36	110-240	2700	80	120	20	>20'000	320mm	2700-3000

D: LED Wand-/Deckenleuchte, quadratisch, Alu, 320mmx35mmx320mm (LxHxB), dimmbar, 36W, 2700lm, IP20, 2700-3000°K- warmweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, quadratique, alu, 320mmx35mmx320mm (LxHxL), dimmable, 2700-3000°K - blanc chaud, 36W, 2700lm, IP20, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLQAB36W-WW**


W	V	lm	CRI	$\triangle$	IP	$h_m$	$\emptyset$	K°
36	110-240	2700	80	120	20	>20'000	320mm	4000-4500

D: LED Wand-/Deckenleuchte, quadratisch, Alu, 320mmx35mmx320mm (LxHxB), dimmbar, 36W, 2700lm, IP20, 4000-4500°K kaltweiss, CRI80, 120°, 110-240V, Farbe weiss, inkl. Driver

F: LED Plafonnier / Applique, quadratique, alu, 320mmx35mmx320mm (LxHxL), dimmable, 4000-4500°K - blanc froid, 36W, 2700lm, IP20, CRI80, 110-240V, 120°, couleur blanc, Driver incl.

Art. Nr. / No. art. / Item no.  
**DLQAB36W-CW**

# NOSER® LED Wand- und Deckenleuchten / Plafonniers et Appliques / Lampadari

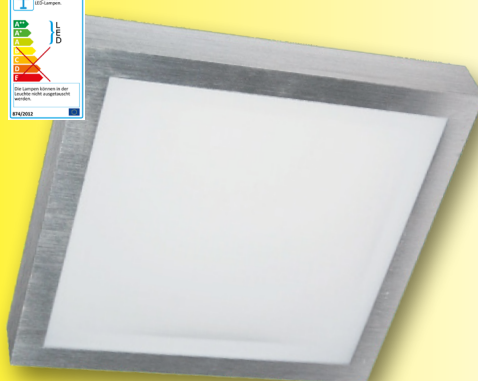

W	V	lm	CRI	$\triangle$	IP	$h_m$	$\emptyset$	K°
20	240	>1600	80	120	20	>20'000	320mm	3000

D: LED Wand-/Deckenleuchte, quadratisch, Alu gebürstet, 320x80x320mm Abdeckung weiss, 20W, 3000°K - warmweiss, IP44, 110-240V, >1500lm, CRI>80, 120°

F: NOSER LED Plafonnier / Applique, quadrique, alu brossé et PMMA UV résistant, couvercle blanc, 20W, 3000°K - blanc chaud, IP44, 110-240V, >1500lm, CRI>80, 120°

Art. Nr. / No. art. / Item no.  
**506.20WWDH**